


DINING ROOM

FIXTURE PLUS
WALL LIGHTING

Create your own environment. Your room can be as relaxing, dramatic, gay; useful or practical as you wish.

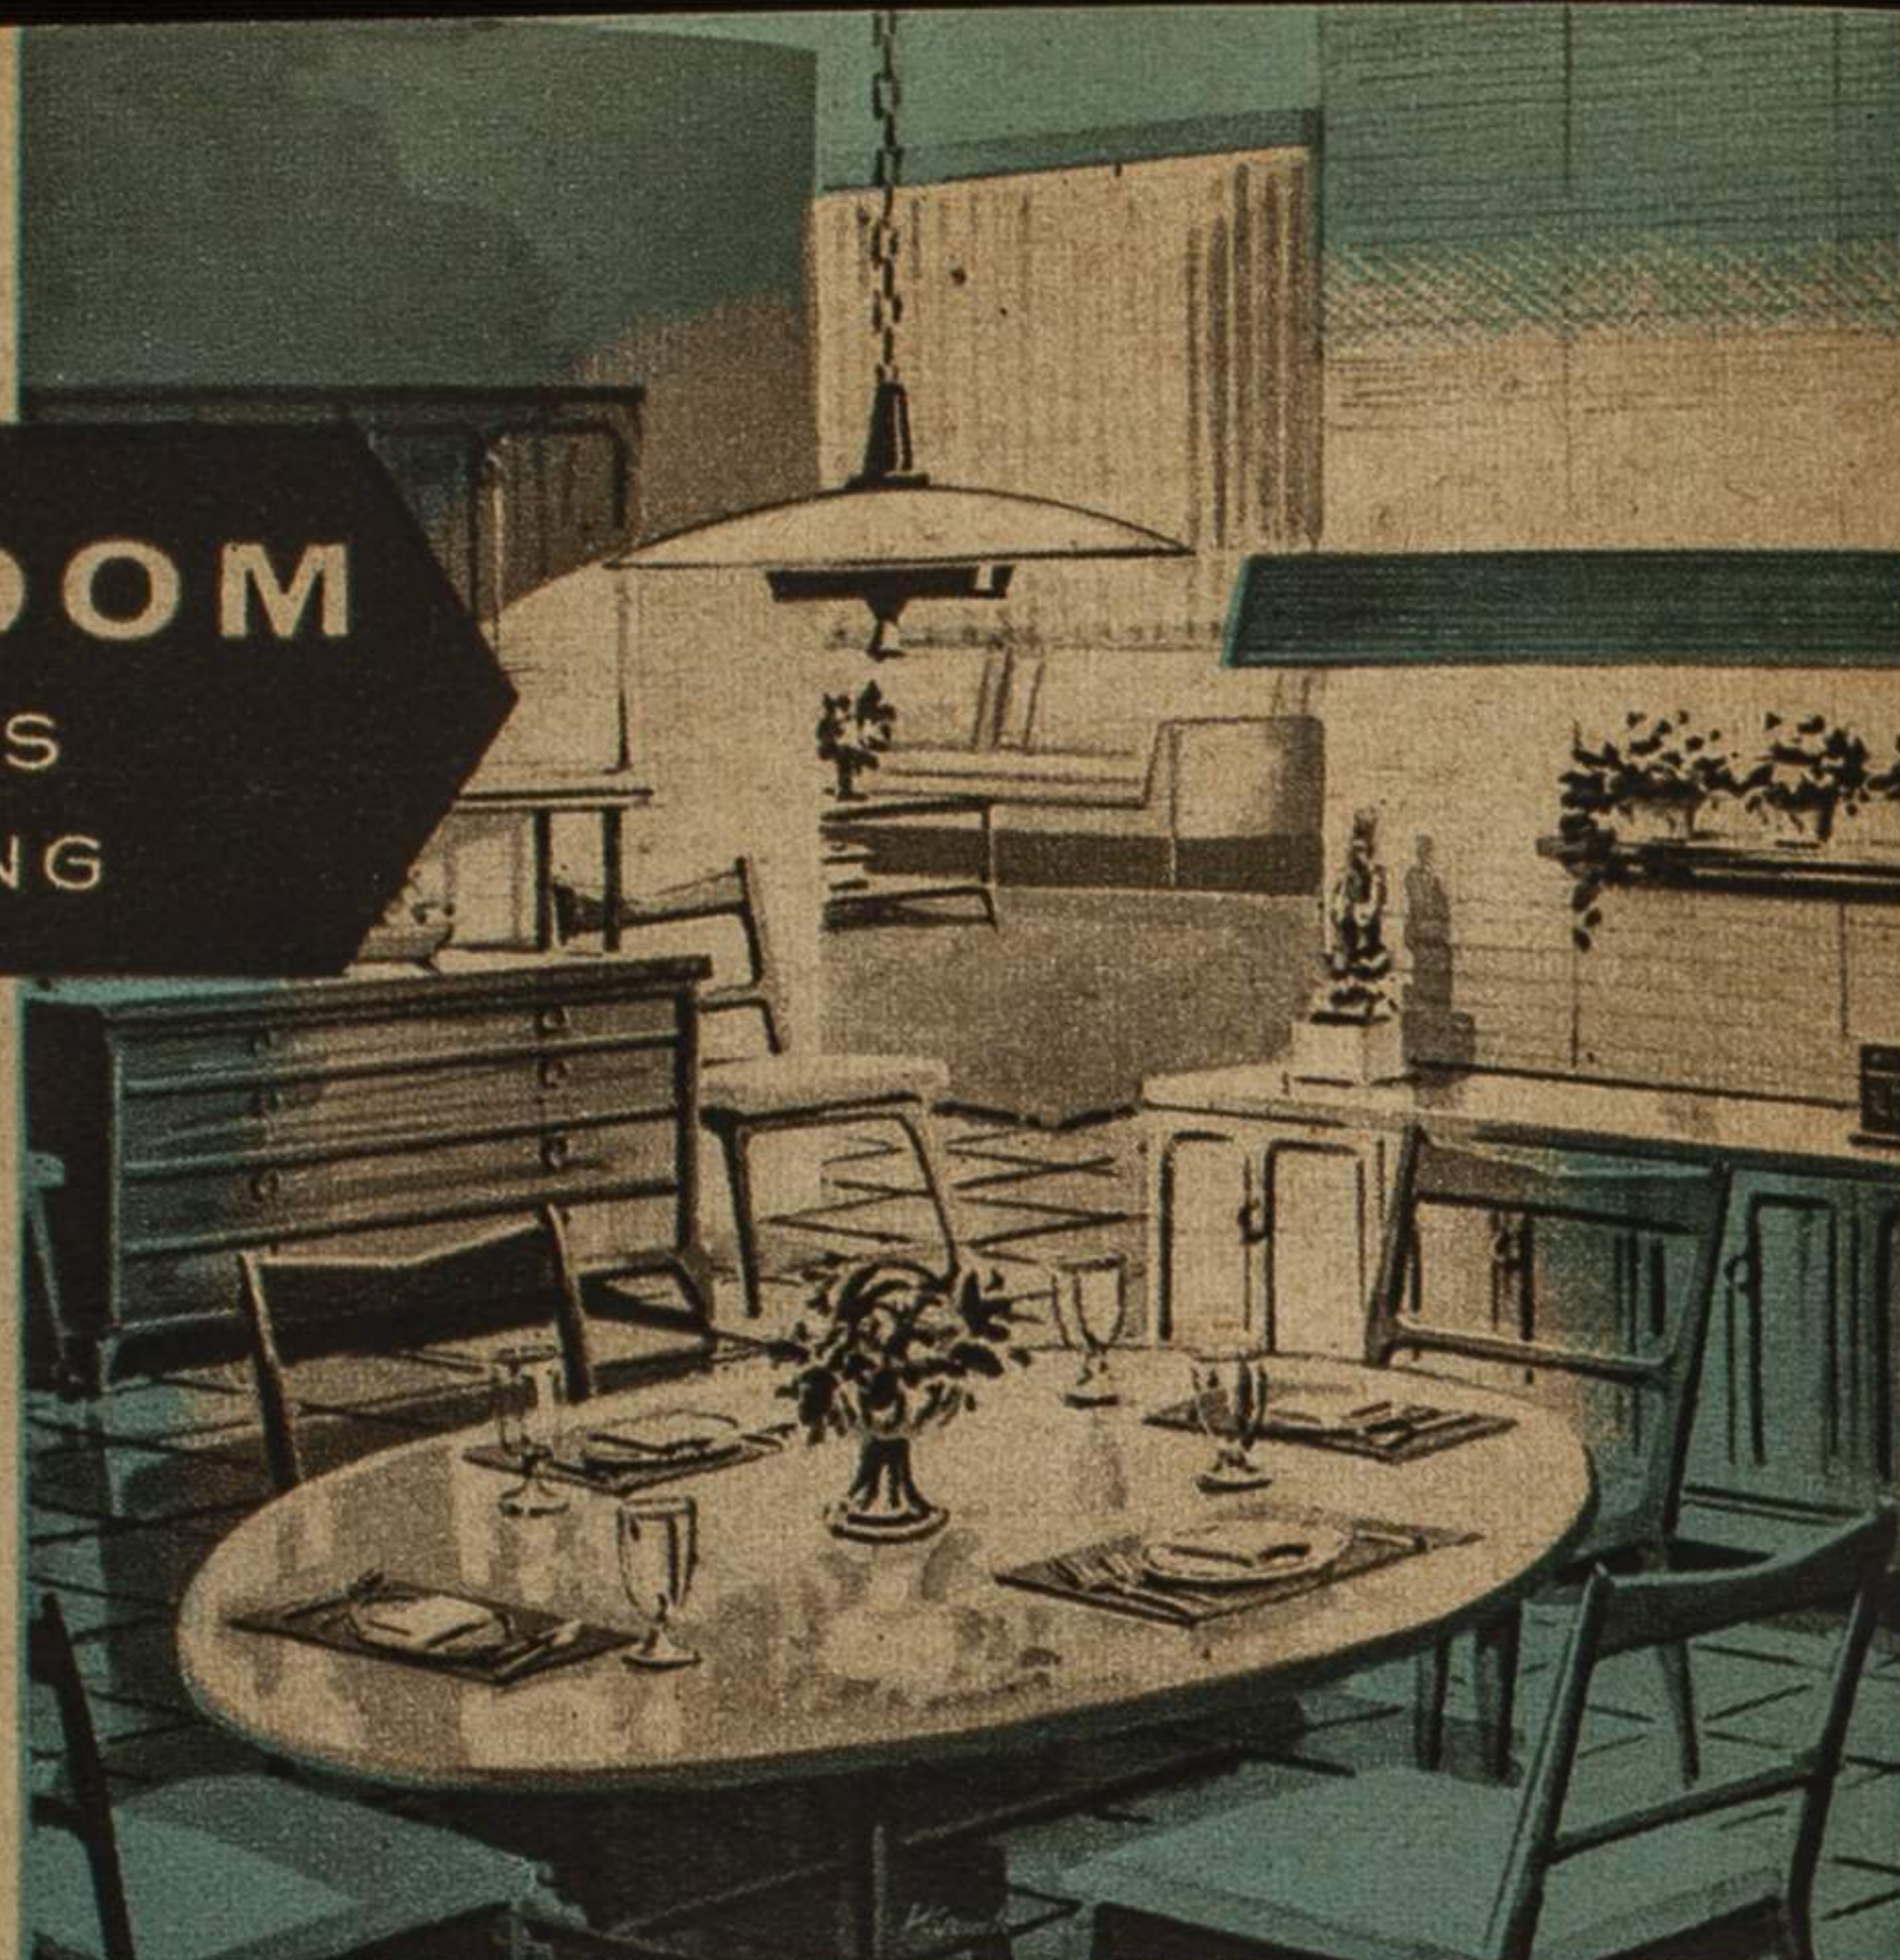

A.



WHAT TO USE

CEILING FIXTURE—directing light up and downward. Min. 18" diameter.* **BULBS:** 4 or more sockets, 40w each. Center over table.

SHIELDING: **A.** Single shield: (ceramic-enameled glassware preferable), close-to-ceiling type, or pendant (about 36" above table) or **B.** Multiple shielding of four or five bulbs (min. 5" dia. shades) plus center downlight (pendant). Reel-type fixture shown in feature illustration, (ceiling track available); min. three 60w or one 150w bulb (three-effect preferable).

PLUS WALL-BRACKET—mounted over buffet or serving area (illustrated).

OR VALANCE OR CORNICE—min. length one 48"-40w DeLuxe Warm White tube. Long units create a more spacious background; see pages 16-19.


OR PORTABLE LAMPS—pair of small table lamps—on the buffet or serving chest; or torcheres with opaque or diffusing reflectors.

IF ROOM IS LIMITED TO DINING—Ceiling Fixture with single or multiple shielding of four 40w or five 25w. Down light not essential but preferred.

If the fixture distributes only down light, add a valance or wall-bracket.


* For large rooms, decorators often use this scale:

Fixture dia. in inches = room diagonal in feet. Multiple-arm chandeliers can be even larger.

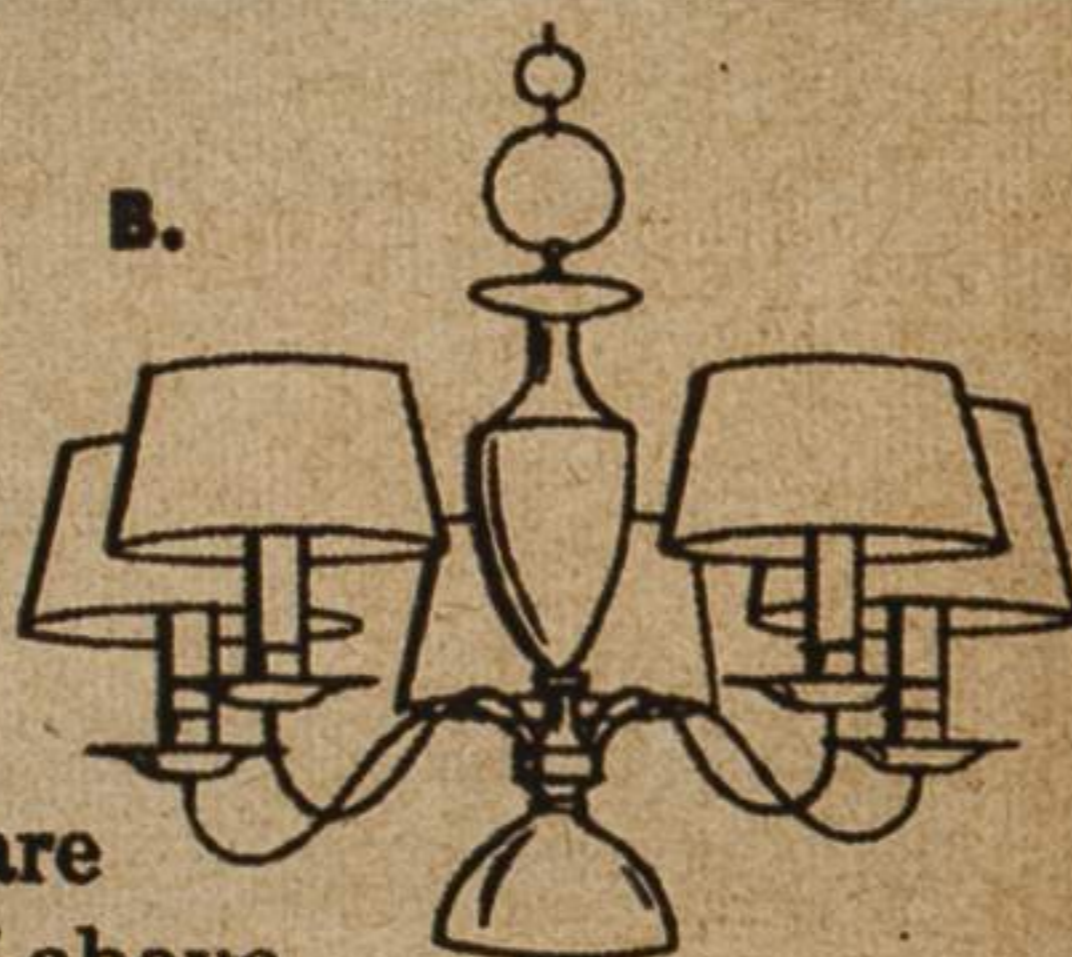

B.

DINING IN KITCHEN AREA

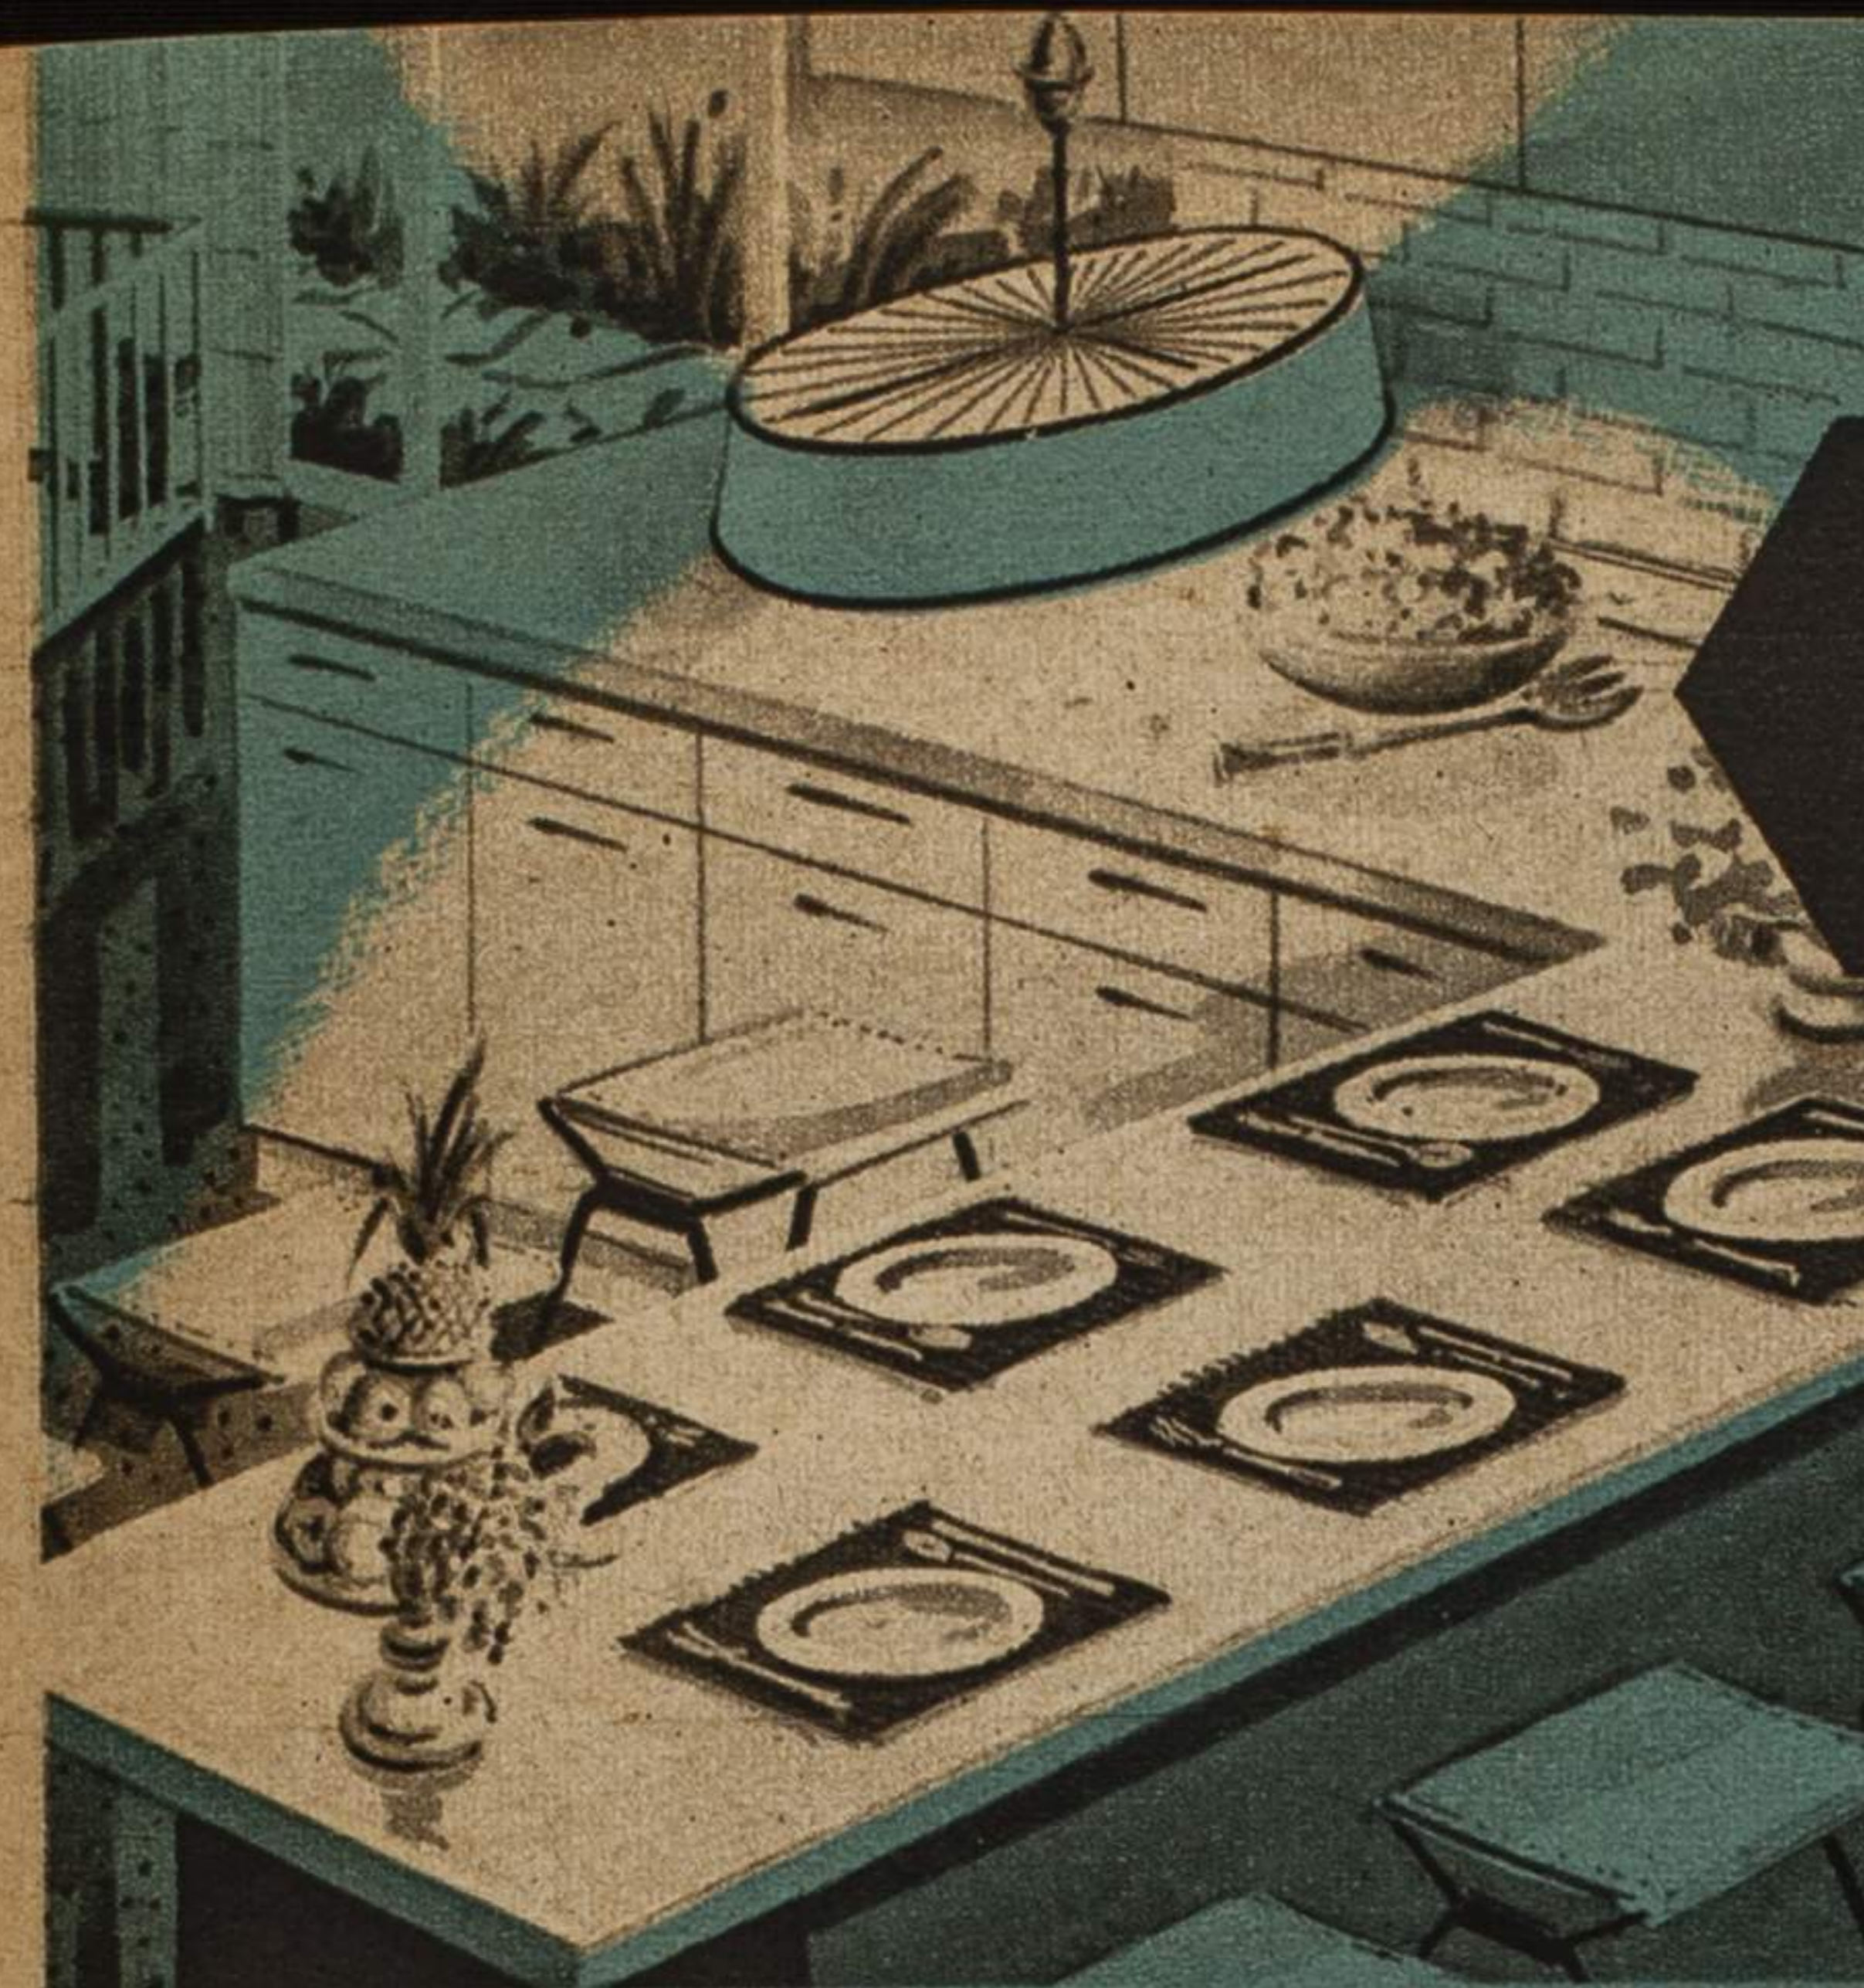

A unit to light the dining counter or table also helps separate it from work centers. The area is important and inviting.

A.



B.



C.



WHAT TO USE

CEILING FIXTURE—centered over table or counter; directing light both up and downward.

A. Close-to-Ceiling Pendant (about 36" above surface) Reel-Type (illustrated).

B. or—each bulb separately shielded, 4" min. dia. each shield.

BULBS: Three or four sockets, min. 120 watts.
SHIELDING: 14" min. diameter, glass or plastic.

C. Pendant, or reel-type: **BULB:** one 150w.
SHIELDING: 14" min. dia., if opaque, have open top for upward lighting.

WALL LIGHTING

Wall-bracket: (see sketch at right) one 36"-30w DeLuxe Warm White tube, or

Wall Lamp: extended arm type, multiple sockets, total 120 watts, min. 14" dia. shade.