
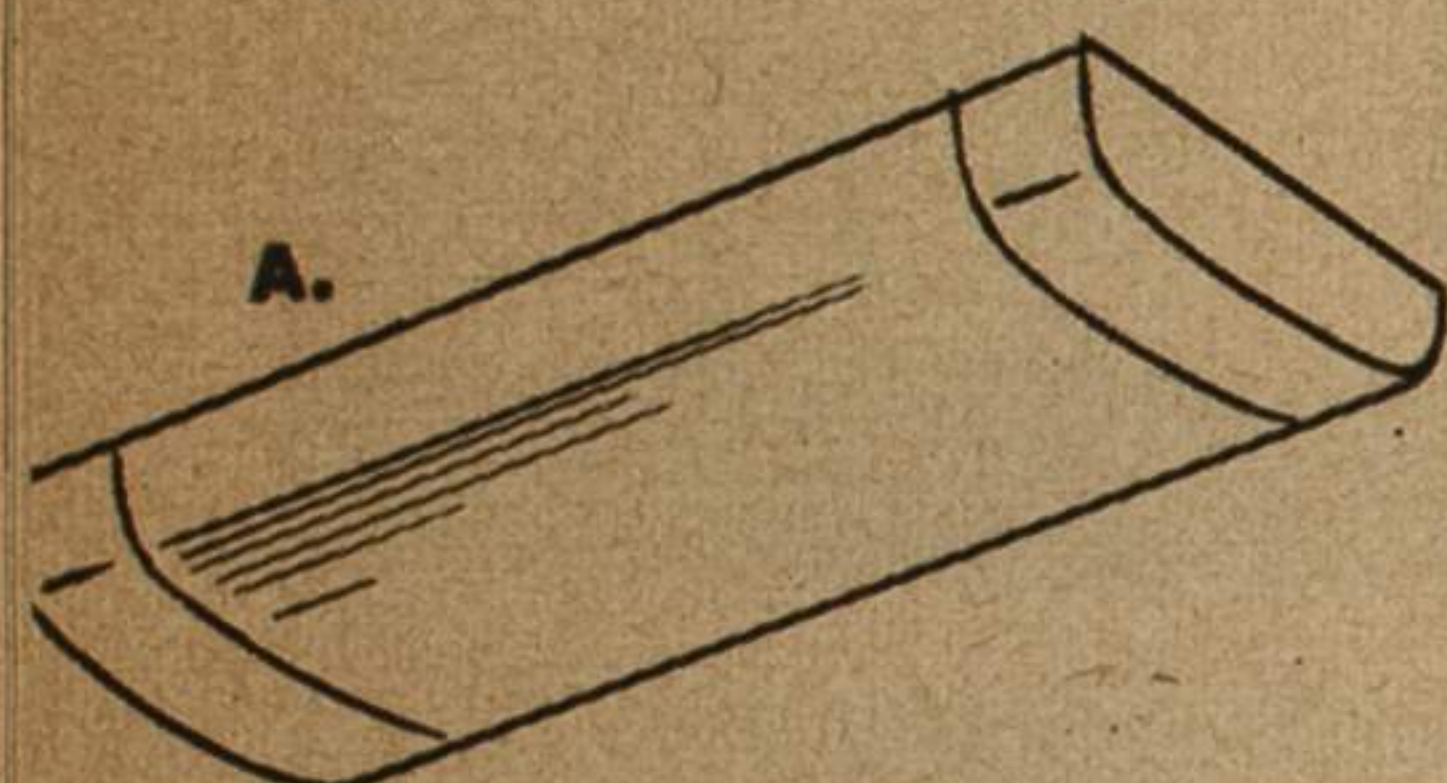


KITCHEN light conditioning recipes are as tried and tested for you as your cooking recipes. When you blend the lighting ingredients with the design of your work areas, you will have a kitchen that is cheerful at all times, that saves time and energy, is easy on the disposition.

lighting recipe *K*

GENERAL LIGHTING FOR KITCHEN

This gives you convenient, over-all lighting.* You can see into drawers and cabinets, read labels easily.

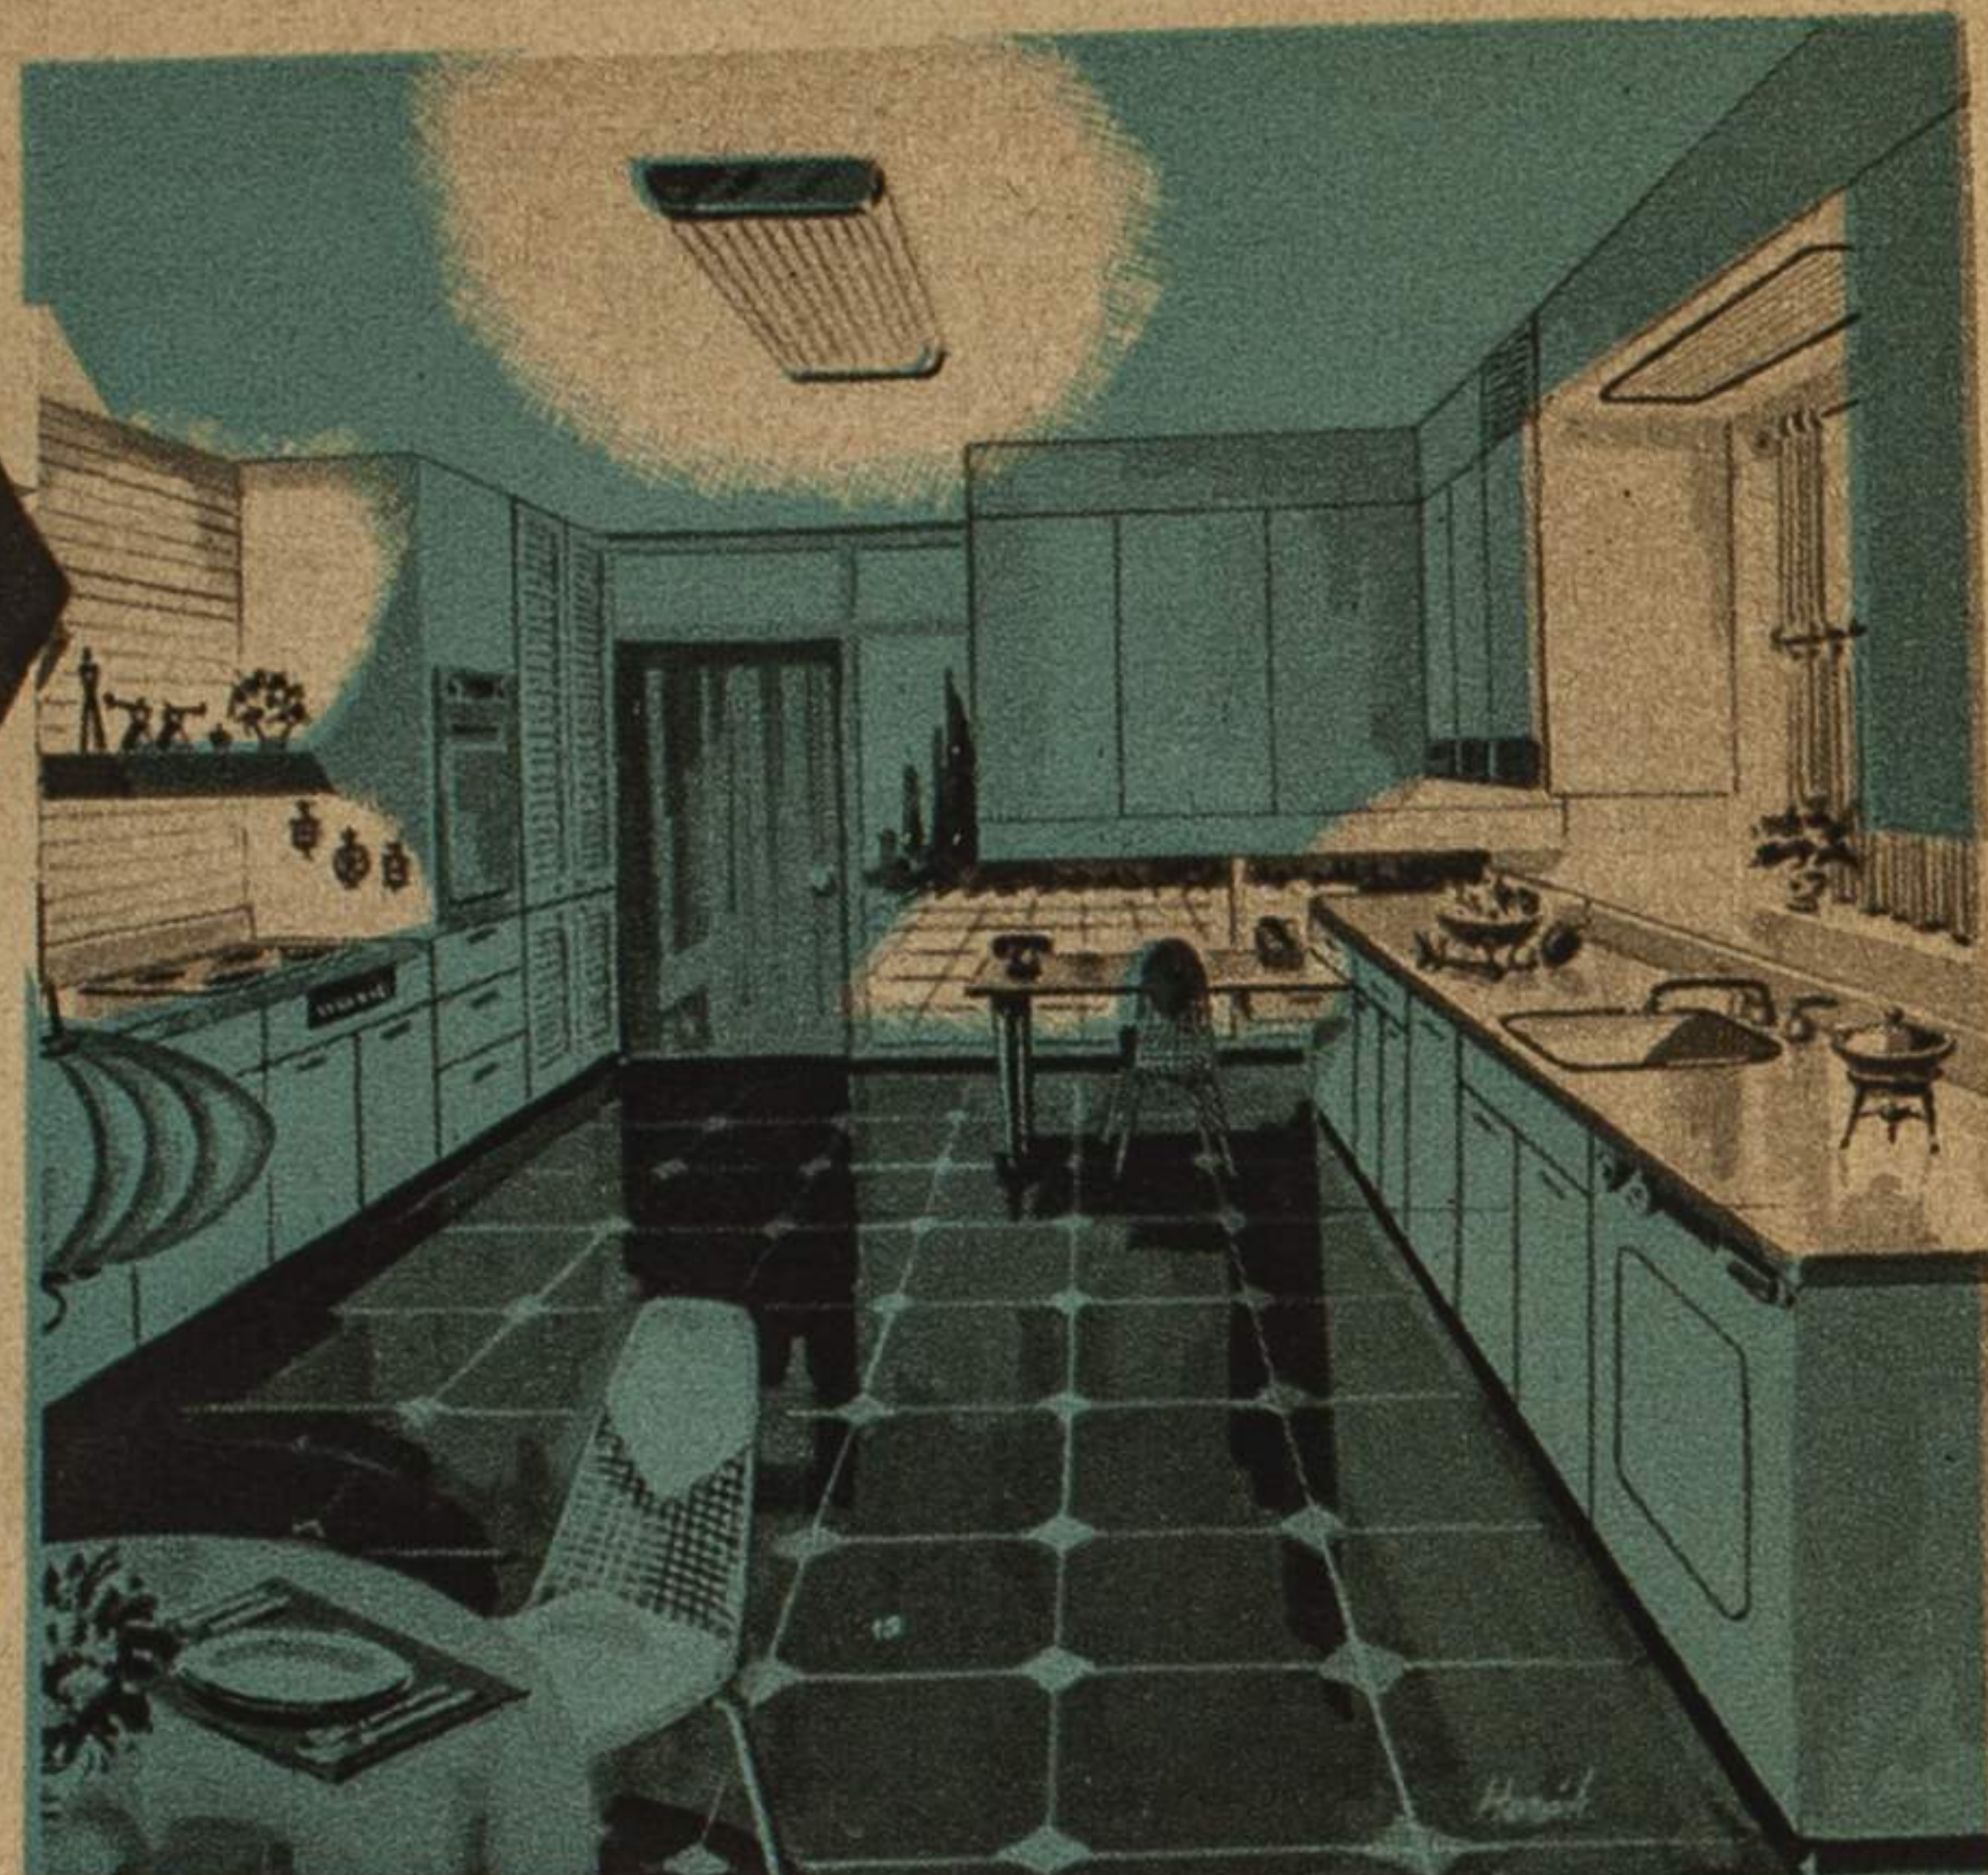

WHAT TO USE

CENTER CEILING FIXTURE

Fluorescent: DeLuxe Warm White, two 48"-40w (feature illustration) or, two 36"-30w or, four 24"-20w, see sketch A.

SHIELDING: complete shield preferable, highly translucent plastic or glass.

Circline: three-lamp unit; 40w, 32w, 22w; or double unit, 40w, 32w.

Incandescent: one 150w; or two 75w; or three 60w.

SHIELDING: ceramic-enameled or opal glassware; plastic. 12" min. dia.

B. closed bowl or square types. **C.** open pan types with deep side.

Silvered-bowl incandescent: one 200w louvered unit; 14" min. dia.

SERVICE HALLS—use smaller sizes of kitchen type. Recipes on Page 37.

*Fluorescent fixtures can provide Trigger or Rapid Starting. See tubes, Page 38.

lighting recipe 10

PREPARING FOOD AT KITCHEN COUNTER



Lighting over work counter erases shadow from recipes to be read, ingredients to be measured and blended.

WHAT TO USE

Fluorescent Bracket: with DeLuxe Warm White tube-s. Fluorescent tubes provide economical lighting over wide areas because of their high light output in a linear shape. Their more diffused light also lessens reflected glare.

A. Commercial type complete with shield, or **B.** Standard channel (white enamel.)

LENGTH: 24"—36" counter—20w

36"—48" counter—30w

48"—60" counter—40w

HEIGHT: 50" to 58" from floor. **SWITCH:** usually at right.

SHIELDING NOT NEEDED on standard channel and tubes, **B.**, if they are

- below a cabinet less than 58" above the floor, and
- could not be in the line of vision of a person seated nearby.

MOUNT: on underside of cabinet near front edge, (tube toward wall). This front position essential if cabinet is less than 52" above floor or, on back wall just beneath the cabinet (tube toward front) **B.**

SHIELDING DEVICE ESSENTIAL if—

- counter is against plain wall (not below cabinet), or
- tube is in line of vision.