

EYERSON MI

Guaranteed for 3 years

These boards comply in every respect with all N.C.A.A. & A.A.U. requirements. They are made of the best grade of Douglas Fir, are 20" wide and taper from $3\frac{1}{2}$ " at rear to $1\frac{3}{4}$ " at tip. Prices quoted include 18" Cocoa Matting. Official Laminated Springboard.

12 ft. Board weight approx. 225 lbs\$	37.00
14 ft. Board weight approx. 250 lbs	
16 ft. Board weight approx. 275 lbs	

GUARANTEE

If board breaks within one year from date of purchase it will be replaced without charge; if board breaks during the second year customer is entitled to purchase a new board at 50% discount; if board breaks during the third year customer is entitled to purchase a new board at 25% discount. Customer to return damaged board by prepaid transportation.

Guarantee is void if fulcrum is located less than the minimum regulation distance as follows:

Fulcrum

Distance

											F	eet
12	ft.	board										4
		board										
16	ft.	board										71/2

"STREAMLINED" SPRINGBOARD LINE

STREAMLINED LOW BOARD No. 401

This unit comes complete with exclusive new improved radius type fulcrum, with tough live rubber cushion. This arrangement positively decreases board breakage.

Galvanized steel supports are arranged for anchoring to any type of walk or for bolting to wooden floats, docks, etc. Twelve foot laminated board is guaranteed against breakage as described.

Stand is made of 2" inside diameter hot galvanized structural steel pipe.

Adjustable fulcrum is new exclusive improved radius type with tough live rubber cushion. This fulcrum will positively decrease board breakage.

Galvanized anchors are of new socket type with brass tightening parts; and are set flush with walk.

Stand is made of 2" inside diameter hot galvanized structural steel pipe with six supporting legs.

Adjustable fulcrum is new exclusive improved radius type with tough live rubber cushion. This fulcrum will positively decrease board breakage.

Galvanized anchors are of new socket type with brass tightening parts; and are set flush with walk.


No. 426 As illustrated with 14 ft. Board. 2 " I. D. Pipe Stand.
Wt. approx. 525 lbs............\$81.00

No. 425 No. 426 No. 426

STREAMLINED OFFICIAL 3 METER UNIT No. 435

This substantial outfit is of new rigid design. The main frame and front supports are built of full 2" inside diameter hot galvanized steel pipe. Braces, hand rails, and ladder risers are of 1½" I. D. galvanized pipe. Flat metal safety steps are hot galvanized and are ribbed to prevent slipping. Galvanized anchors are of new socket type with brass tightening parts. Adjustable fulcrum is new exclusive improved radius type with tough live rubber cushion. This fulcrum will positively decrease board breakage. Due to the 2" inside diameter pipe construction, scientific bracing, and spacing, we can guarantee this to be the most rigid three meter stand on the market. Unit comes complete with guaranteed official laminated springboard, 18" cocoa matting runner and meets all requirements of both N. C. A. A. and A. A. U.

No. 435 As illustrated with 16 ft. Board. Ship. wt. approx. 825 lbs....... \$135.00

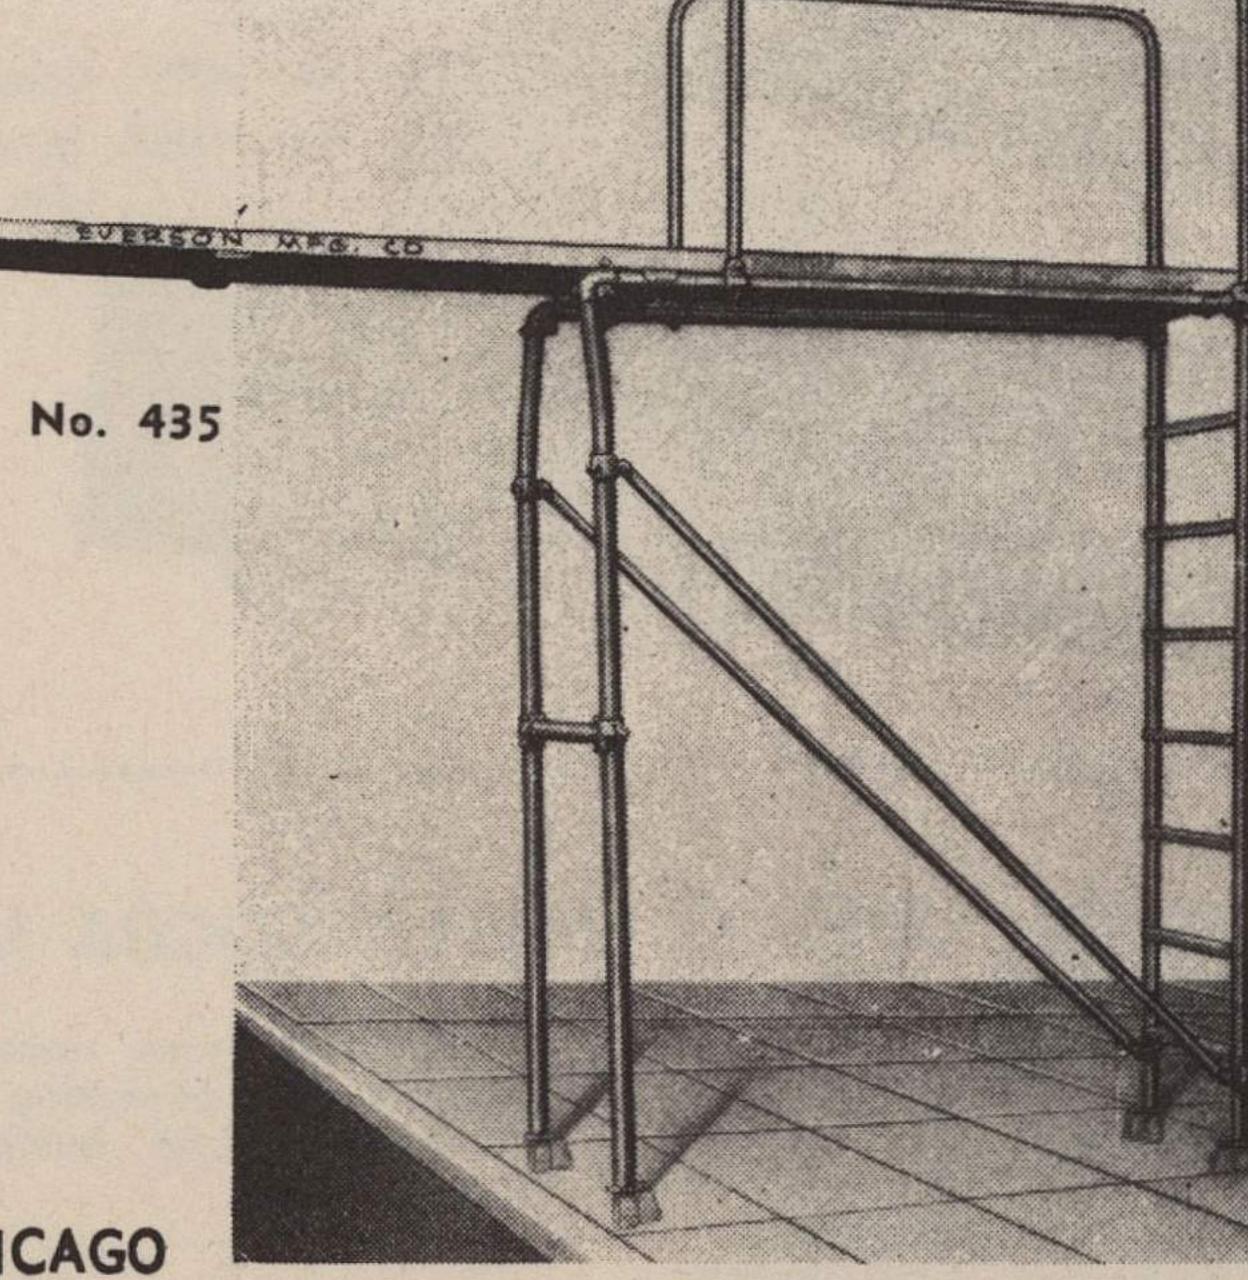

ALL PRICES SUBJECT TO CHANGE-ALL PRICES NET 30 DAYS. F. O. B. CHICAGO

EVERSON FILTER SERVICE COMPANY

214 W. HURON STREET

PRICES INCREASED 10%

CHICAGO, ILLINOIS
BULLETIN No. 711B-2M-6-43